



Through type Waterproof Brass Cable Gland



Material: Brass, nickel plated

Claw: PA

Sealing and sealing ring: NBR


Approvals: IP68, ISO9000, TUV

Protection degree: IP68

Temperature Resistance: -40°C to 100°C, short time to 120°C.

Thread length: Standard Thread type is used for the equipment which has inner Thread or for the thin board. Longer Thread type is used for the thick board.

Function: Extremely easy installation, simply insert cable through the assembled gland and tighten gland locknut until cable is secured. These cable glands are designed to withstand water, dust, salt, acid-base, alcohol, oil and common solvent.

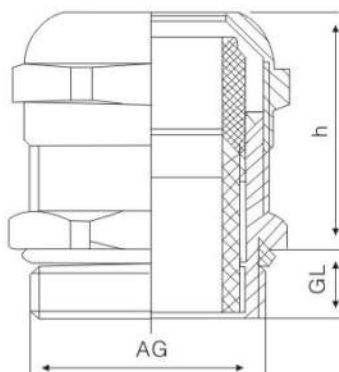

Through type Waterproof Brass Cable Gland

Code	Thread AG	Cable range (mm)	Thread O. D. (mm)	Mounting Hole diameter (mm)	Thread length GL (mm)	Joint lengthh (mm)	Spanner size (mm)
M12-TR	M12×1.5	6.5-3	12	12-12.2	7	19	14
M14-TR	M14×1.5	8-4	14	14-14.2	7	19	17
M16-TR	M16×1.5	8-4	16	16-16.2	8	20	18
M18-TR	M18×1.5	10-5	18	18-18.2	8	21	20
M20-TR	M20×1.5	12-6	20	20-20.2	8	22	22
M22-TR	M22×1.5	14-10	22	22-22.2	8	23	24
M24-TR	M24×1.5	14-10	24	24-24.2	9	25	24/27
M25A-TR	M25×1.5	14-10	25	25-25.2	9	25	24/27
M25B-TR	M25×1.5	16-8	25	25-25.2	9	27	27
M25C-TR	M25×1.5	18-13	25	25-25.2	9	27	30/27
M27A-TR	M27×1.5	18-13	27	27-27.2	9	27	30
M27B-TR	M27×2	18-13	27	27-27.2	9	27	30
M28A-TR	M28×1.5	18-13	28	28-28.2	9	27	30
M28B-TR	M28×2	18-13	28	28-28.2	9	27	30
M30A-TR	M30×1.5	18-13	30	30-30.2	9	29	30/32
M30B-TR	M30×2	18-13	30	30-30.2	9	29	30/32
M32A-TR	M32×1.5	22-15	32	32-32.2	10	29	35
M32B-TR	M32×1.5	20-16	32	32-32.2	10	29	35
M32C-TR	M32×2	22-15	32	32-32.2	10	29	35
M36A-TR	M36×1.5	25-18	36	36-36.2	10	31	40
M36B-TR	M36×2	25-18	36	36-36.2	10	31	40
M37A-TR	M37×1.5	25-18	37	37-37.2	10	31	40
M37B-TR	M37×2	25-18	37	37-37.2	10	31	40
M40A-TR	M40×1.5	25-18	40	40-40.2	11	31	40/45
M40B-TR	M40×2	25-18	40	40-40.2	11	31	40/45
M40C-TR	M40×1.5	30-22	40	40-40.2	11	35	45
M40D-TR	M40×2	30-22	40	40-40.2	11	35	45
M42A-TR	M42×1.5	30-22	42	42-42.2	11	35	45
M42B-TR	M42×2	30-22	42	42-42.2	11	35	45
M60A-TR	M60×1.5	44-37	60	60-60.2	13	38	64
M60B-TR	M60×2	44-37	60	60-60.2	13	38	64
M63A-TR	M63×1.5	44-37	63	63-63.2	13	38	64/68
M63B-TR	M63×2	44-37	63	63-63.2	13	38	64/68
M64A-TR	M64×1.5	44-37	64	64-64.2	13	38	64/68
M64B-TR	M64×2	44-37	64	64-64.2	13	38	64/68
M72-TR	M72×2	52-42	72	72-72.2	15	42	78
M75-TR	M75×2	52-42	75	75-75.2	15	42	78
M80-TR	M80×2	62-50	80	80-80.2	15	45	86/88
M88-TR	M88×2	70-60	88	88-88.2	15	45	98
M100-TR	M100×2	80-70	100	100-100.2	15	45	110

Through type Waterproof Brass Cable Gland



Code	Thread AG	Cable range (mm)	Thread O. D. (mm)	Mounting Hole diameter (mm)	Thread length GL (mm)	Spanner size (mm)
BPG-7	PG7	6.5-3	12.5	12.5-12.7	7	14
BPG-9	PG9	8-4	15.2	15.2-15.4	8	17
BPG-11	PG11	10-5	18.6	18.6-18.8	8	20/21
BPG-13.5	PG13.5	12-6	20.4	20.4-20.6	8	22
BPG-16	PG16	14-10	22.5	22.5-22.7	9	24
BPG-21	PG21	18-13	28.3	28.3-28.5	9	30
BPG-25	PG25	22-15	32	32-32.2	10	35
BPG-29	PG29	25-18	37	37-37.2	11	40
BPG-36	PG36	33-25	47	47-47.2	12	50
BPG-42	PG42	38-32	54	54-54.2	13	57
BPG-48	PG48	44-37	59.3	59.3-59.5	14	64
BPG-63	PG63	52-42	72	72-72.2	15	78