






WARNING LIGHT/MOTOR SIREN

www.fortindo-fsm.com

WARNING LIGHT

● EXTERNAL VIEW DRAWING

- Constant long lighting
- Blinking lighting
- Revolving lighting

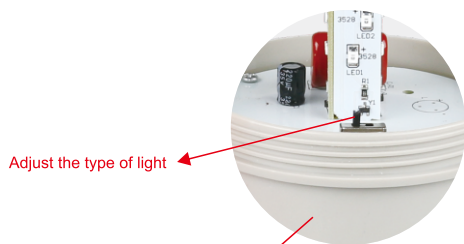

BRIGHTNESS LED & UNIQUE SHADE

- Using Ultra-high brightness LED light tube
- Installation can be used: Magnetic, bolt
- Product can be installed buzzer customized
- Easily install: Round Base
- Using high-tech electronic principle to transfer signals
- Voltage options: AC 220V, DC12-24V. Other voltage types can be customized.
- Material: shade-AS, base-PP
- Certification: CE
- Protection degree: IP55

WIRING METHOD

- This product is connected with power line and signal line, refer to wiring diagram, connect power line and buzzer line.
- When using AC power, wiring is no need to be divided into positive and negative (power line color is irrelevant).
- When using DC power, black wire connect to negative pole.

MODEL	VOLTAGE	POWER	COLOR
LTD-1101M	DC12V DC24V AC220V	3W	R
LTD-1101MJ			Y G B



WARNING LIGHT/MOTOR SIREN


www.fortindo-fsm.com

WARNING LIGHT

LED/SCREW BASE

● EXTERNAL VIEW DRAWING

- Constant long lighting
- Blinking lighting
- Revolving lighting

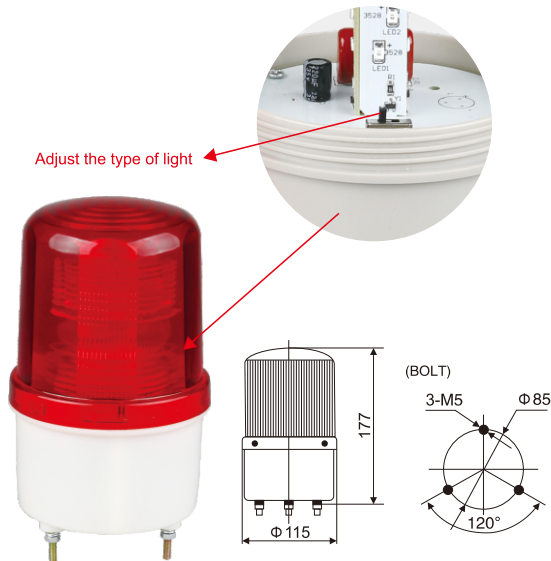

BRIGHTNESS LED & UNIQUE SHADE

- Using Ultra-high brightness LED light tube
- Installation can be used: Screw
- Product can be installed buzzer customized
- Easily install: Round Base
- Using high-tech electronic principle to transfer signals
- Voltage options: AC 220V, DC12-24V. Other voltage types can be customized.
- Material:Plastic.Cover-PC, Bottom-ABS
- Certification: CE

MODEL	VOLTAGE	POWER	COLOR
LTD-5121M	DC12V DC24V AC220V	3W	R
LTD-5121MJ			Y
			G
			B

WARNING LIGHT

LED/BLINKING/MAGNET BASE

● EXTERNAL VIEW DRAWING



BRIGHTNESS LED & UNIQUE SHADE

- Using Ultra-high brightness LED light tube
- Installation can be used: Magnetic
- Product can be installed buzzer customized
- Easily install: Round Base
- Using high-tech electronic principle to transfer signals
- Voltage options: AC 220V, DC12-24V. Other voltage types can be customized.
- Material:Plastic.Cover-PC, Bottom-ABS
- Certification: CE

MODEL	VOLTAGE	POWER	COLOR
LTE-5095	DC12V DC24V	3W	R
			Y




WARNING LIGHT/MOTOR SIREN

www.fortindo-fsm.com

MS-190 MINI MOTOR SIREN

● EXTERNAL VIEW DRAWING

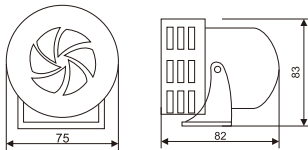


BRIGHTNESS LED & UNIQUE SHADE

- High in durability and excellent in remote signal reansmissiondue to high volume capacity
- Suitable for various types of cranes,vessels and fire warning systems
- Body standard color:RED
- Insulation resistance:100MΩ(at 500 VDC)
- Dielectric strengn:500VAC,50/60Hz in 1 minute

Model	Voltage	Power	Sound Pressure	Shell
MS-190	DC12V DC24V AC110V AC220V	120W	90-100dB Radius 1 meter	Metal

MS-290 MOTOR SIREN

● EXTERNAL VIEW DRAWING

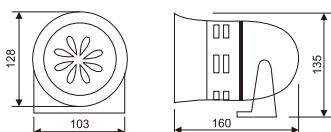

BRIGHTNESS LED & UNIQUE SHADE

- High in durability and excellent in remote signal reansmissiondue to high volume capacity
- Suitable for various types of cranes,vessels and fire warning systems
- Body standard color:RED
- Insulation resistance:100MΩ(at 500 VDC)
- Dielectric strengn:500VAC,50/60Hz in 1 minute

Model	Voltage	Power	Sound Pressure	Shell
MS-190	DC12V DC24V AC110V AC220V	130W	95-105dB Radius 1 meter	Plastic/Metal




WARNING LIGHT/MOTOR SIREN

www.fortindo-fsm.com

MS-390 HEAVY DUTY MOTOR SIREN

● EXTERNAL VIEW DRAWING

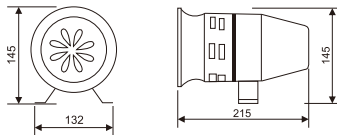


BRIGHTNESS LED & UNIQUE SHADE

- High in durability and excellent in remote signal reansmissiondue to high volume capacity
- Suitable for various types of cranes,vessels and fire warning systems
- Body standard color:RED
- Insulation resistance:100MΩ(at 500 VDC)
- Dielectric strengn:500VAC,50/60Hz in 1 minute

Model	Voltage	Power	Sound Pressure	Shell
MS-390	DC12V DC24V AC110V AC220V	130W	100-110dB Radius 1 meter	Metal

MS-490 HEAVY DUTY MOTOR SIREN

● EXTERNAL VIEW DRAWING

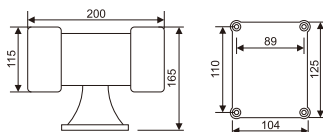

BRIGHTNESS LED & UNIQUE SHADE

- High in durability and excellent in remote signal reansmissiondue to high volume capacity
- Suitable for various types of cranes,vessels and fire warning systems
- Body standard color:RED
- Insulation resistance:100MΩ(at 500 VDC)
- Dielectric strengn:500VAC,50/60Hz in 1 minute

Model	Voltage	Power	Sound Pressure	Shell
MS-490	DC12V DC24V AC110V AC220V	200W	105-115dB Radius 1 meter	Metal




WARNING LIGHT/MOTOR SIREN

www.fortindo-fsm.com

MS-590 HEAVY DUTY MOTOR SIREN

● EXTERNAL VIEW DRAWING

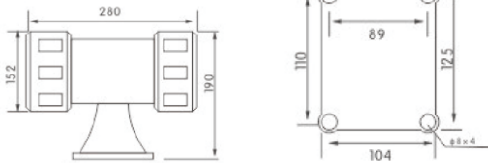


BRIGHTNESS LED & UNIQUE SHADE

- High in durability and excellent in remote signal reansmissiondue to high volume capacity
- Suitable for various types of cranes,vessels and fire warning systems
- Body standard color:RED
- Insulation resistance:100MΩ(at 500 VDC)
- Dielectric strengn:500VAC,50/60Hz in 1 minute

Model	Voltage	Power	Sound Pressure	Shell
MS-590	DC12V DC24V AC110V AC220V	500W	123dB Radius 1 meter	Metal

MS-690 HEAVY DUTY MOTOR SIREN

● EXTERNAL VIEW DRAWING

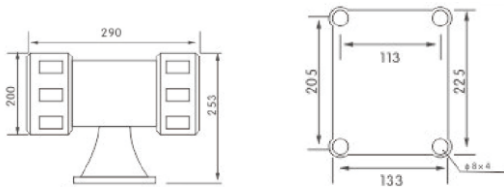

BRIGHTNESS LED & UNIQUE SHADE

- High in durability and excellent in remote signal reansmissiondue to high volume capacity
- Suitable for various types of cranes,vessels and fire warning systems
- Body standard color:RED
- Insulation resistance:100MΩ(at 500 VDC)
- Dielectric strengn:500VAC,50/60Hz in 1 minute

Model	Voltage	Power	Sound Pressure	Shell
MS-690	DC12V DC24V AC110V AC220V	700W	126dB Radius 1 meter	Metal




WARNING LIGHT/MOTOR SIREN

www.fortindo-fsm.com

MS-790 HEAVY DUTY MOTOR SIREN

● EXTERNAL VIEW DRAWING

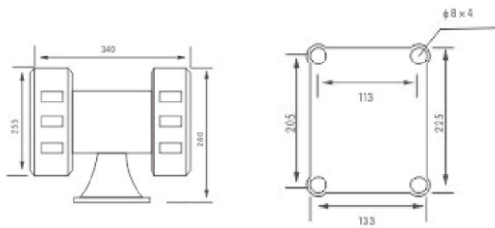

BRIGHTNESS LED & UNIQUE SHADE

- High in durability and excellent in remote signal reansmissiondue to high volume capacity
- Suitable for various types of cranes,vessels and fire warning systems
- Body standard color:RED
- Insulation resistance:100M Ω (at 500 VDC)
- Dielectric strengn:500VAC,50/60Hz in 1 minute

Model	Voltage	Power	Sound Pressure	Shell
MS-790	DC12V DC24V AC110V AC220V	900W	130dB Radius 1 meter	Metal