

PRICE LIST

PRODUK BARU 2026



Your Panel Solution



KABEL NYAF

CABLE WIRING



Harga kabel NYAF
Per 17 Juni 2026

v6.1

Description :

- * Kabel NYAF FORT standard SNI (SNI 04-6629.3)
- * Material Conductor : Round Flexible Annealed Copper Wire (f), Class 5 IEC 60228
- * Material Insulation : Polyvinyl Chloride (PVC)
- * Rate Voltage :
 - > Ukuran 0.75 - 1.0mm : 300/500V , standard IEC-06 (60227)
 - > Ukuran 1.5 - 35mm : 450/750V , standard IEC-02 (60227)
- * Test Voltage : 2.5kV / 5Min
- * Max. Conductor Temperature : 70°C
- * Made In Indonesia
- * Bersertifikat :



Deskripsi	Ukuran (mm)	Type	Warna	Packing	Harga Nett/M (Rp)
Kabel NYAF 	0.75	NYAF-0.75	Hitam, Merah, Kuning, Biru, Kuning-Hijau, Abu2, Coklat	100M/Roll	2.770
	1.0	NYAF-1.0			3.650
	1.5	NYAF-1.5			4.980
	2.5	NYAF-2.5			8.460
	4	NYAF-4.0	Hitam, Merah, Kuning, Biru, Kuning-Hijau		12.900
	6	NYAF-6.0			20.500
	10	NYAF-10			33.200
	16	NYAF-16	Hitam, Kuning-Hijau		50.300
	25	NYAF-25	Hitam	50M/Roll	76.500
	35	NYAF-35	Hitam		105.600
	50	NYAF-50	Hitam		151.600
	75	NYAF-70	Hitam		215.600

Note :

- * Harga diatas adalah Netto
- * Harga dapat berubah sewaktu-waktu mengikuti harga LME global.
- * Minimum order :
 - > Ukuran 0.75 - 16mm per 1 Roll
 - > Ukuran 25 - 35mm per Meter



Earth Fault Relay & Over Current Protection Relay



Description		Type	Price (Rp)
Earth Fault Relay  * Power voltage : 240VAC/50Hz $\pm$ 10% * Current Transformer / CT ratio : .../5A * VA rating : 3VA(max) * Tripping contact rated voltage : 250VAC * Tripping contact rated continuous current : 6A * Low set earth fault : 0.1 - 2A * High set earth fault : 1x I - 5x I * Time delay (DELAY) adjustment : 0.1 - 1.0sec * Panel mounted size : 96*96		FKER-141	1,596,000
 * Power voltage : 240VAC/50Hz $\pm$ 10% * Current Transformer / CT ratio : .../5A * VA rating : 3VA(max) * Tripping contact rated voltage : 250VAC * Tripping contact rated continuous current : 6A * Low set earth fault : 0.1 - 2A * High set earth fault : 1x I - 5x I * Time multiplier (TM) adjustment : 0.01 - 1.0sec * Panel mounted size : 96*96		FKER-152	1,853,250
Over Current Relay  * Power voltage : 240VAC/50Hz $\pm$ 10% * Current Transformer / CT ratio : .../5A * VA rating : 3VA(max) * Tripping contact rated voltage : 250VAC * Tripping contact rated continuous current : 6A * Low set over current : 2 - 6A * High set over current : 1x I - 5x I * Time delay (IDT) adjustment : 0.01 - 1.0sec * Panel mounted size : 96*96		FKCR151	2,089,500
 * Power voltage : 240VAC/50Hz $\pm$ 10% * Current Transformer / CT ratio : .../5A * VA rating : 3VA(max) * Tripping contact rated voltage : 250VAC * Tripping contact rated continuous current : 6A * Low set over current : 2 - 6A * High set over current : 1x I - 5x I * Time multiplier (TM) adjustment : 0.01 - 1.0sec * Panel mounted size : 96*96		FKCR153	2,142,000

Description	Type	Price (Rp)
Earth Leakage Relay  * Power voltage : 240VAC/50Hz $\pm$ 10% * Zero CT connection monitoring * VA rating : 3VA(max) * Tripping contact rated voltage : 250VAC * Tripping contact rated continuous current : 6A * Earth leakage tripping current setting : 0.1 - 1.0A * Time delay (DELAY) setting : 0.1 - 3.0sec * Panel mounted size : 96*96 	FKLR121	1,358,700
 * Power voltage : 240VAC/50Hz $\pm$ 10% * Zero CT connection monitoring * VA rating : 3VA(max) * Tripping contact rated voltage : 250VAC * Tripping contact rated continuous current : 6A * Earth leakage tripping current setting : 30mA - 30A * Time delay (DELAY) setting : 0 - 3.0sec * DIN - RAIL mounted	FKLR523	908,250

Zero Phase Current Transformers / Zero CT

Description	Diameter (mm)	Type	Price (Rp)
 * Operation current range : 30mA - 30A * Class : 5P10 	40	FKTC-40	241,500
	80	FKTC-80	472,500
	100	FKTC-100	485,100
	150	FKTC-150	681,450
	200	FKTC-200	1,282,050

Description	Type	Price (Rp)
3Phase DIN - Rail Digital Multimeter/Power Meter  Measurement function : V, A, Hz, kW, Kwh, kVar, kVA, CosØ, kVarh. * Communication via Modbus RS485 * 3Phase/4wire * Voltage range : 0-450VAC * Ampere range : 0-9999/5A/1A * Frequency range : 45-65Hz * Operating power : 200-240VAC * Class : 0.5 	FCN-3D4PY	1,165,500
Power Factor Controller 24 Step LCD  Measurement function : Cos Ø, V, A, Hz, kW, Kvr * Power voltage : 220VAC/50Hz * Control output : 220VAC/3A * Output Signal : 24 Step * Communication via Modbus RS485 * Size : 144*144*76	SY-JKWBX-24AT	2,782,500

Description	Type	Price (Rp)
Analog Voltage Protection Relay  * Over Voltage : 2% - 20% * Under Voltage : -20% - 2% * Phase Sequence * Phase Failure * Delay Time : 2s	FBT8-B02	260,400
Analog Voltage Protection Relay  * Over Voltage : 2% - 20% * Under Voltage : -20% - 2% * Delay Time : 0,1s - 10s * Asymmetry : 8% * Phase Sequence * Phase Failure	FBT8-B03	333,900
Analog Phase Protection Relay  * Asymmetry : 8% * Phase Sequence * Phase Failure * Delay Time : 0,1s - 10s	FBT8-B06	235,200
3-Phase Digital Voltage Protection Relay  * Rated voltage (Un) : 220VAC (L1-N) * Operating range : (0,8-1,1) x Un * Frequency : 50/60 Hz * Under Voltage (UV) : Umin = 300-370VAC * Over Voltage (OV) : Umax = 390-460VAC * Unbalanced Voltage (asymmetry) : (0,05-0,20) %5-20 * Phase Failure * Phase Sequence * On delay time (Voltages) : 00.1-99,9 Sec * On delay time (Frequency) : 00.1-99,9 Sec * Returning delay Time : 00,1-99,9 Sec	FDPR3V	569,100
1-pahse Digital Voltage & Current Protection Relay  * 1 Phase 220VAC * Rated Voltage : 100 - 450VAC * Rated Current : 1-63A (Default 63A) * Over Voltage Range : 230 - 300VAC (Default 270V) * Under Voltage Range : 140 - 210VAC (Default 170V) * Voltage Delay Time : 1-400s (Default 2s) * Current Delay Time : 1-30s (Default 5s) * Reconnect time : 1-400s (Default 3s)	FDPVAP-1	178,500
3-Phase Digital Voltage & Current Protection Relay  * Rated Working Voltage: AC220V * Operating Voltage range : AC140V-500V (3 Phase) * Rated Frequency : 50/60 Hz * Rated Working Current : 1-100A * Over Voltage Protection : 390-500VAC; 230-300VAC * Under Voltage Protection : 140V-370VAC; 140-210VAC * Voltage Power off time : 1-400s * Overcurrent Protection Value : 1-100A * Overcurrent Power off time : 1-30s * Recover time (Starting Delay Time : 1-400s	FDPVAP-3	650,475



Description	Type	Price (Rp)
 STAR - DELTA Timer * Operating voltage : 12-240VAC/DC * Output contact : 2xSPDT * Current range : 2X16A * Time t1(star) : 0.1s - 10minute * Time t2(delay) : 0.1 - 1seconds	FBT7-E	246,750
 ANALOG Timer 24hours * 1 Channels daily program 24hours * Operating voltage : 230-240VAC * Power reserve : 3 day * Switching capacity : 250VAC/16A (resistive load) 1000watt (Lamp load) * Shortest Switching time : 15min	FT180A	210,000
 STAIRCASE Lighting Timer * Automatic control switch on-off lighting * Operating voltage : 200 - 240VAC * Switching capacity : 1NO 250VAC/16A (resistive load) 1000wa(Lamp load) * Adjustable time delay setting : 30s - 30min	FTS-1	175,350
 ANALOG PLUG-IN Timer * 24hours timer * Operating voltage : 200-230VAC * Program per day : 48 ON/OFF * Switching capacity : 230VAC/16A (resistive load), 3680watt (Lamp load) * Min. setting g time : 15mins * Plug with children protection	FTG-16A	73,500
	FTG-63A	77,700
 DIGITAL WEEKLY PLUG-IN Timer * Weekly timer (7day setting) * Operating voltage : 200-230VAC * Program per day : 18/20 ON/OFF * Switching capacity : 230VAC/16A (resistive load), 3680watt (Lamp load) * Min. setting g time : 1mins/1seconds * Rechargeable NI-MH battery * Plug with children protection	FETG-68A (16 ON/OFF)	139,650
	FETG-63A (20 ON/OFF)	149,100

Lightning Striker Counter



	Description	Display	Type	Price (Rp)
	Analog Lightning Striker Counter * Min. current sensitivity : 350A * Max. detectable current : 100kA * Dimension installation hole : 30mm * Protection : IP66	6 Digit (0-999999)	FLRC-S/II	1,975,000
	Analog Lightning Striker Counter * Min. current sensitivity : 350A * Max. detectable current : 100kA * Dimension installation hole : 40mm * with reset press button * Protection : IP65	4 Digit (0-9999)	FRLRC-S/R-43	2,385,000
	Digital Lightning Striker Counter * Power Voltage : 220VAC * Min. Current Sensitivity : 0.1kA (8/20us) * Dimension Installation Hole : 9mm * with reset press button * Protection : IP20	4 Digit (0-9999)	FLRC-D	2,897,000

Electronic Energy Meter

(Kwh Meter) Communication with moudbus RS485

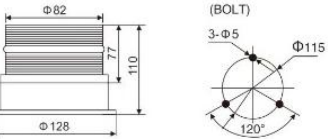
Description	Rate Current (A)	Type	Price (Rp)
LCD - Kwh Single Rate / Tarif  1 Phase, 2wire/50Hz * Class 1.0 * Direct connection 220VAC * with moudbus RS485	5 (100)A	XTM75SC-S	605,000
 3 Phase, 4wire/50Hz * Class 1.0 * Direct connection 3X220/380VAC * with moudbus RS485	5 (100)A	XTM1250SC-S	1,568,000
	by CT../5A	XTM1250SCCT-S	1,568,000

Hydrophore Sequencing Relay

Description	Output Contact	Type	Price (Rp)
 * Operating Voltage : 150-150VAC (L-N) / 50Hz * Contact Relay : 3A/250VAC * Delay time range : off, 10min - 12hour * Contact Output : 2 pump & 3 pumps 	2 Pumps	FHSR-02X	472,500
	3 Pumps	FHSR-03X	577,500

Solar Warning Light (Warning lamp tenaga surya)

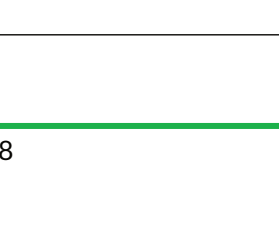


Description	Color	Type	Price (Rp)
  * Flashing Light * LED life time : 20.000 hours * Battery : 2000mAh/3.7V rechargeable battery * Solar cell : Φ 80, 120mA * Recharged 8 hours can work 120-150 hours * Power LED : 2 Watt * Magnet base (dudukan magnet) * Protection : IP65 	RED YELLOW BLUE	FLTD-5095-2	289,800

Heatshrink Cable Breakout / Celana Kabel



Description	Diameter hole (mm)	Cable Size(mm)	Type	Price (Rp)
 * 3 Core cable * Voltage : 1kV - 6.6kV	3*13 / 1*34	10 - 16	FRSZT-1/3.0	29,400
	3*16 / 1*43	25 - 50	FRSZT-1/3.1	30,450
	3*26 / 1*55	70 - 120	FRSZT-1/3.2	35,700
	3*40 / 1*75	150 - 240	FRSZT-1/3.3	61,950
	3*50 / 1*85	300 - 400	FRSZT-1/3.4	72,450
 * 4 Core cable * Voltage : 1kV - 6.6kV	4*13 / 1*36	10 - 16	FRSZT-1/4.0	30,450
	4*16 / 1*49	25 - 50	FRSZT-1/4.1	31,500
	4*26 / 1*69	70 - 120	FRSZT-1/4.2	36,750
	4*40 / 1*80	150 - 240	FRSZT-1/4.3	65,100
	4*50 / 1*94	300 - 400	FRSZT-1/4.4	79,800

Description			Cable Size (mm)	Type	Price / set (Rp)	Certificate Test Report
	12/20 (24)kV INDOOR	3 - Core	35-70	FNLS-20/3.1	1,969,000	12/20(24)kV    PT. FORTINDO SURSES MAKUR 检验报告 Inspection Report 
			95-150	FNLS-20/3.2	2,156,000	
			185-300	FNLS-20/3.3	2,344,000	
			400-630	FNLS-20/3.4	2,531,000	
	12/20 (24)kV OUTDOOR	3 - Core	35-70	FWLS-20/3.1	2,156,000	
			95-150	FWLS-20/3.2	2,344,000	
			185-300	FWLS-20/3.3	2,531,000	
			400-630	FWLS-20/3.4	2,719,000	
	12/20 (24)kV INDOOR	1 - Core	35-70	FNLS-20/1.1	750,000	
			95-150	FNLS-20/1.2	844,000	
			185-300	FNLS-20/1.3	938,000	
			400-630	FNLS-20/1.4	1,031,000	
	12/20 (24)kV OUTDOOR	1 - Core	35-70	FWLS-20/1.1	844,000	
			95-150	FWLS-20/1.2	938,000	
			185-300	FWLS-20/1.3	1,031,000	
			400-630	FWLS-20/1.4	1,125,000	
	6/12 (15)kV INDOOR	3 - Core	25-50	FNLS-12/3.1	891,000	6/12(15)kV    PT. FORTINDO SURSES MAKUR 检验报告 Inspection Report 
			70-120	FNLS-12/3.2	984,000	
			150-240	FNLS-12/3.3	1,078,000	
			300-400	FNLS-12/3.4	1,172,000	
	6/12 (15)kV OUTDOOR	3 - Core	25-50	FWLS-12/3.1	984,000	
			70-120	FWLS-12/3.2	1,078,000	
			150-240	FWLS-12/3.3	1,172,000	
			300-400	FWLS-12/3.4	1,266,000	
	6/12 (15)kV INDOOR	1 - Core	25-50	FNLS-12/1.1	422,000	
			70-120	FNLS-12/1.2	469,000	
			150-240	FNLS-12/1.3	516,000	
			300-400	FNLS-12/1.4	563,000	
	6/12 (15)kV OUTDOOR	1 - Core	25-50	FWLS-12/1.1	469,000	
			70-120	FWLS-12/1.2	516,000	
			150-240	FWLS-12/1.3	563,000	
			300-400	FWLS-12/1.4	609,000	



Description	Type	Price (Rp)
1-Phase AC LED Digital Ampere Meter  * 1Phase/2wire * Ampere range : 0-9999/5A * Operating power : 200-240VAC * Class : 0.5 * Size 96x96, 72x72, 48x96	FCN300-A1	241,500
3-Phase AC LED Digital Ampere Meter  * 3Phase/4wire * Ampere range : 0-9999/5A * Operating power : 200-240VAC * Class : 0.5 * Size 96x96, 72x72	FCN300-A3	441,000
1-Phase AC LED Digital Volt Meter  * 1Phase/2wire * Voltage range : 450VAC (L-N) * Operating power : 200-240VAC * Class : 0.5 * Size 96x96, 72x72, 48x96	FCN300-V1	241,500
3-Phase AC LED Digital Volt Meter  * 3Phase/4wire * Voltage range : 450VAC (L-N) / 750VAC * Operating power : 200-240VAC * Class : 0.5 * Size 96x96, 72x72	FCN300-V3	441,000
1-Phase AC LED Digital HZ Meter  * 1Phase/2wire * Voltage range : 0-450VAC * Operating power : 200-240VAC * Frequency range : 45-65Hz * Class : 0.5 * Size 96x96, 72x72, 48x96	FCN300-F1	241,500

AUTO TRANSFER SWITCH

Specification :



- * Control Power Supply : 220VAC / 7Amperer, 50Hz
- * Rated short time current : 10kA
- * Mechanical time : 17000 time
- * Electrical time : 6000 time
- * Operation Cycle time (waktu pemindahan posisi) : 0.1 second/detik
- * Sistem Kerja perpindahan posisi I-0-II dengan Selenoid
- * 2 Input / 1 Ouput

Description		Type	Price (Rp)
	63A/4POLE	FTGQ5-125IE63A-4	2,971,500
	100A/4POLE	FTGQ5-125IE100A-4	3,150,000
	125A/4POLE	FTGQ5-125IE125A-4	3,360,000
	160A/4POLE	FTGQ5-250IE160A-4	9,030,000
	250A/4POLE	FTGQ5-250IE250A-4	9,240,000
	400A/4POLE	FTGQ5-400IE400A-4	11,235,000
	630A/4POLE	FTGQ5-6300IE630A-4	12,285,000

DC DIGITAL PANEL METER

Description	Size	Type	Price (Rp)
DC AMPERE METER  * 1Phase/2wire * Operating power : 200-240VAC * Ampere range : 0 - 9999ADC * With Shunt ../75mV * Class : 0.5	96 X 96	FCN300A-96DC	383,250
	72 X 72	FCN300A-72DC	383,250
	48 X 96	FCN300A-48DC	383,250
DC VOLT METER  * 1Phase/2wire * Operating power : 200-240VAC * Voltage range : 600VDC * Class : 0.5	96 X 96	FCN300V-96DC	383,250
	72 X 72	FCN300V-72DC	383,250
	48 X 96	FCN300V-48DC	383,250

BUSBAR SISIR

Description	Size	Ampere	Type	Price (Rp)
 Busbar MCB 2Phase	27 X 2 Pole	63A	FBM-2T	197,600
 Busbar MCB 4Phase	14 X 4 Pole	100A	FBM-4	556,400

Auto Transfer Switch / ATS



Description		Pole	Ampere	Type	Price(Rp)
	ATS Solar - PLN	2P	63A	FTQ2-63/2P	686,000
	* Sumber Power A : Solar /Tenaga Surya		100A	FTQ2-100/2P	686,000
	* Sumber Power B : PLN	4P	63A	FTQ2-63/4P	771,000
	* Short Circuit Current : 50kA		100A	FTQ2-100/4P	771,000
	ATS Genset - PLN	2P	63A	FGQ2-63/2P	686,000
	* Sumber Power A : PLN 100A		100A	FGQ2-100/2P	686,000
	* Sumber Power B : Generator / Genset	4P	63A	FGQ2-63/4P	771,000
	* Short Circuit Current : 50kA		100A	FGQ2-100/4P	771,000

Busbar Support

Description		Size for Busbar Copper (mm)	Type	Price (Rp)
 Busbar Support 3Pole * Include Long screw 4set		2*10 / 1*10	FBS-610	216,000
 Busbar Support 4Pole * Include Long screw 5set		2*10 / 1*10	FBS-810	306,000

CUTTING TOOLS DIN - RAIL MCB

Description		Rail MCB Tickness (mm)	Type	Price (Rp)
 Alat Pemotong Rail MCB (Alluminium & Besi) * Rail MCB 1 Fungsi * Rail MCB 2 Fungsi		0.7 - 1.5mm	FDRC-1/2	1,300,000

NEW PILOT LAMP

Description	Color	Type	Price (Rp)
 Lebih terang - Lebih hemat NEW PRODUCT * Input voltage : 220VAC/DC * Size : 22mm	Red Green Yellow Blue White	FAD22-22DS	7,620

POTENTIOMETER

Description	Resistance	Type	Price (Rp)
 * Size : 22mm	1k Ω , 5k Ω , 10k Ω , 20k Ω , 50k Ω	FAD116-22PM	40,425

WATER - PROOF MCB BOX

Description	Grup	Qty/Carton (pcs)	Type	Price/PC (Rp)
 * Material : ABS * Protection Degree : IP65 * Water proof * Rubber sealing in the cover box * Surface mounted / Out Bow	5	40	FHT-5W	95,550
	8	30	FHT-8W	135,450
	12	20	FHT-12W	195,300
	18	15	FHT-18W	279,300
	24	10	FHT-24W	355,320

INDUSTRIAL DISTRIBUTION BOX

Description	Type	Price (Rp)
6 Way Distribution Box  * BOX material ABS, IP55 * Voltage : 220-250VAC/16A * 3pcs Socket 3X16A, IP44 * 3pcs Socket 3X16, IP67 * ELCB 2P/25A, HIMEL (SNI) * MCB 1P/16A, HIMEL (SNI) * Include cable 3X2.5mm, 2Meter (SNI)	FT-G058	2,090,000
3 Way Distribution Box  * Box Material ABS, IP55 * Volatge : 220-250VAC / 16A * 3pcs Socket 3X16A, IP44 * ELCB 2P/25A, Himel (SNI) * MCB 1P/16A, Himel (SNI) * Include cable 3X2.5mm, 2Meter (SNI)	FT-ZH1802-A	1,485,000

Description			Type	Price (Rp)
 WaterProof Connection BOX * Material : PC/PA66 * IP Protection : IP68 * Capacity : 24A / 450VAC * Temperature Rating : -40°C ~ +105°C * Cabel Range : 0.5 - 6mm		2 WAY	FM686-2	59,745
		3 WAY	FM686-3	64,575
		4 WAY	FM686-4A	69,510
			FM686-4B	72,660
		5 WAY	FM686-5	96,915
		6 WAY	FM686-6	105,000

Description			Type	Price (Rp)
Hour Meter * Parameter : 0 - 99999,99 hours * Voltage : 220 - 240VAC / 50Hz		48 X 48mm	FHM-2	193,200

Description			Type	Price (Rp)
Brass Cable Gland * Material : Nickel - Plated Brass * IP Protection : IP65		44 - 37mm	M63 X 1.5	324,000
		52 - 42mm	M75 X 2	534,000
		70 - 60mm	M88 X 2	900,000
		80 - 70mm	M100 X 2	1,819,200

Description			Type	Price (Rp)
 Fire Extinguisher Device * Operating Temperature :50°C - 90 °C * Service Life : 10 years * Thermal Detection Response Time : ≤5s * Protected Space/m³ : ≤0,1m³ * Effective Extinguishing time : ≤30s			FST-MHZZ-01	139,125

CONNECTOR CCO ALLUMINIUM

Description	Size	Type	Price (Rp)
CONNECTION CABLE CCO 	16-16	FTCCO-16/16	4,070
	16-35	FTCCO-16/35	4,840
	35-35	FTCCO-35/35	6,820
	35-70	FTCCO-35/70	8,470
	50-70	FTCCO-50/70	13,200
	70-70	FTCCO-70/70	13,640
	70-150	FTCCO-70/150	30,470
	150-150	FTCCO-150/150	33,880
	150-240	FTCCO-150/240	50,600
	240-240	FTCCO-240/240	53,900




ENGSEL PANEL

Description	Type	Price (Rp)
	HX233	33,600

PRESSURE TRANSMITTER

Description	Pressure	Type	Price (Rp)
 * Input : 10 - 30VDC * Output : 4 -20mA * Pressure Port : G 1/4 * Protection Grade : IP65	0 - 10bar	LFT2000-10	661,500
	0 - 16bar	LFT2000-16	682,500
	0 - 30bar	LFT2000-30	735,000

CONTROL BOX GROUNDING / FURSE INSPECTION PIT

Description	Size	Material	Description	Type	Price (Rp)
Cover Warna Putih 	300X300X210	PP + Fiber Glass (Anti panas/ tidak mudah pecah)	Box Only	FSWL-3030W	619,500
			Box with Busbar Copper Grounding	FSWL-3030WBC	885,500
Cover Warna Hitam 	280X280*180	Resin (Anti panas/ tidak mudah pecah)	Box Only	FSWL-2828-B	577,500
			Box with Busbar Copper Grounding	FSWL-2828-BBC	851,000

Description			Cable Size(mm)	Type	Price(Rp)
	Cable Schoen Copper (Cu)	2 hole	35-8	DTS35-2-8	60,600
			50-10	DTS50-2-10	100,800
			70-10	DTS70-2-10	129,600
			95-12	DTS95-2-12	153,600
			120-12	DTS120-2-12	187,200
			150-12	DTS150-2-12	244,800
			185-16	DTS185-2-16	331,200
			240-16	DTS240-2-16	384,000
			300-16	DTS300-2-16	556,800
	Cable Schoen Bimetal (AL-Cu)	2 hole	50-10	DTSL50-2-10	54,000
			70-12	DTLS70-2-12	76,300
			95-12	DTLS95-2-12	96,000
			120-12	DTLS120-2-12	115,700
			150-14	DTLS150-2-14	141,400
			185-14	DTLS185-2-14	180,000
			240-14	DTLS240-2-14	225,400
			300-16	DTLS300-2-16	308,600
	Cable Schoen Alluminium (AL)	2 hole	35-8	DLS35-2-8	14,600
			50-10	DLS50-2-10	16,300
			70-12	DLS70-2-12	20,200
			95-12	DLS95-2-12	27,000
			120-12	DLS120-2-12	35,200
			150-14	DLS150-2-14	41,200
			185-14	DLS185-2-14	51,500
			240-14	DLS240-2-14	61,700
			300-16	DLS300-2-16	107,200

Price list per 1 April 2026

Wall Mounting Active Harmonic Filter (3Phase, 4 Wire), THDu< 15%

Type	Rating Capacity (A)	Voltage	Dimension (mm)	Price List (Rp)
SYICD-APF0.4/35-3P4L-BD	35	380VAC /50Hz	378*525*200	60,274,000
SYICD-APF0.4/50-3P4L-BD	50		378*525*200	65,274,000
SYICD-APF0.4/75-3P4L-BD	75		418*556*200	73,828,000
SYICD-APF0.4/100-3P4L-BD	100		503*611*232	96,494,000
SYICD-APF0.4/150-3P4L-BD	150		573*621*250	125,200,000
SYICD-APF0.4/200-3P4L-BD	200		694*680*250	189,994,000



Drawer/Rack Mounted Active Harmonic Filter (3Phase, 4 Wire), THDu< 15%

Type	Rating Capacity (A)	Voltage	Dimension (mm)	Price List (Rp)
SYICD-APF0.4/35-3P4L-CD	35	380VAC /50Hz	359*538*200	60,274,000
SYICD-APF0.4/50-3P4L-CD	50		359*538*200	65,274,000
SYICD-APF0.4/75-3P4L-CD	75		399*626*200	73,828,000
SYICD-APF0.4/100-3P4L-CD	100		484*624*232	96,494,000
SYICD-APF0.4/150-3P4L-CD	150		554*634*250	125,200,000
SYICD-APF0.4/200-3P4L-CD	200		674*715*250	189,994,000



Cabinet Type Active Harmonic Filter (3Phase, 4 Wire), THDu< 15%

Type	Rating Capacity (A)	Voltage	Module	Dimension (mm)	Price List (Rp)
SYICD-APF0.4/200-3P4L-A	200	380VAC /50Hz	2*100A module	800*1000*2200	349,000,000
SYICD-APF0.4/250-3P4L-A	250		1*150A + 1*100A module	800*1000*2200	350,000,000
SYICD-APF0.4/300-3P4L-A	300		2*150A module	800*1000*2200	410,000,000
SYICD-APF0.4/400-3P4L-A	400		2*150A + 1*100A module	800*1000*2200	514,000,000
SYICD-APF0.4/500-3P4L-A	500		2*150A + 2*100A module	800*1000*2200	630,000,000
SYICD-APF0.4/600-3P4L-A	600		4*150A module	800*1000*2200	706,000,000



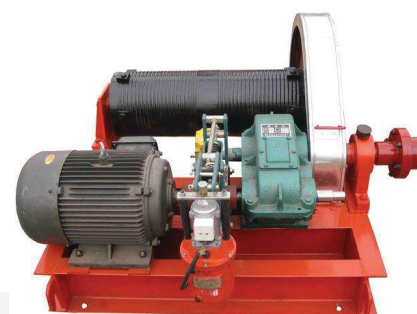
KC-270 Series

Untuk aplikasi pemakaian di Hoist crane

Advantages is:

1. Customizable Anti-Shaking function to suppress load sway
2. Safety protection during hoisting (Anti-Dropping)
3. Stable power output during VFD starting
4. Standard CANopen communication protocol


Model/Type	Description	Price (Rp)
KC270-4T-0015G	15KW,3-phase,320V~460V	12,705,000
KC270-4T-0018G	18.5KW,3-phase,320V~460V	14,227,500
KC270-4T-0022G	22KW,3-phase,320V~460V	19,582,500
KC270-4T-0030G	30KW,3-phase,320V~460V	24,451,350
KC270-4T-0037G	37KW,3-phase,320V~460V	30,326,100
KC270-4T-0045G	45KW,3-phase,320V~460V	37,348,500
KC270-4T-0055G	55KW,3-phase,320V~460V	47,953,500
KC270-4T-0075G	75KW,3-phase,320V~460V	53,602,500
KC270-4T-0090G	90KW,3-phase,320V~460V	57,634,500
KC270-4T-0110G	110KW,3-phase,320V~460V	75,516,000
KC270-4T-0132G	132KW,3-phase,320V~460V	85,307,250
KC270-4T-0160G	160KW,3-phase,320V~460V	152,379,150
KC270-4T-0185G	185KW,3-phase,320V~460V	173,779,200
KC270-4T-0200G	200KW,3-phase,320V~460V	188,316,450
KC270-4T-0220G	220KW,3-phase,320V~460V	226,905,000



KC270 Main Application field:

- Electric hoist
- Bridge crane
- Gantry crane
- Tower crane
- Winch
- Logistics hoist
- Port machinery



Description			Type	Price (Rp)
	Isolation Transformer - Single Phase 220VAC	3.15kVA	KD20P50 3.15KVA	33,000,000
		5kVA	KD20P50 5KVA	36,667,000
		6.3kVA	KD20P50 6.3KVA	41,250,000
		8kVA	KD20P50 8KVA	43,083,000
		10kVA	KD20P50 10KVA	45,833,000
	Isolation Transformer - Three Phase 380VAC	10kVA	KD20P50 10KVA/3	64,167,000
		15kVA	KD20P50 15KVA/3	73,333,000
		20kVA	KD20P50 20KVA/3	82,500,000
	Power Supply Input : 110 - 250VAC	5VDC	KD20P50 4005	1,650,000
		15VDC	KD20P50 4015	1,650,000
	Insulation Monitor	LCD Display	KD20P50 2023	25,667,000
	KWIS Intelligent Terminal	LED Display	KD20P50 5200	4,767,000
		LCD Display	KD20P50 5301	5,767,000
	KWIS Intelligent Terminal (central alarm)	7 inch	KD20P50 5507	32,817,000
		10 inch	KD20P50 5510	44,092,000
	Insulation Fault Evaluation Instrument	LCD Display	KD20P50 6000	12,833,000
	Insulation Fault Locator	4 channels	KD20P50 6104	12,833,000
		8 channels	KD20P50 6108	14,667,000
		12 channels	KD20P50 6112	16,500,000
	Gateway	128 I/O	KD20P50 7100	4,125,000
	Current transformer	0.66kV	KD20P50 3181	802,000
	Insulation Fault location transformer	0.66kV	KD20P50 3182	802,000



Your Panel Solution